

PROJECT ESTIMATION REPORT

Project: Test Report
Date: January 15, 2026

System Input

Item	Value
System Input	YES 45TU FRONT SET(OG)
Finish	Clear
Elevation Type	1
Total Count	1.00
Bays Wide	4.00
Bays Tall	2.00
Custom Bay Widths	Equal distribution
Custom Bay Heights	Equal distribution
Opening Width	144.00 in
Opening Height	96.00 in
Sq Ft per Type	96.00 sqft
Total Sq Ft	96.00 sqft
Perimeter Ft	40.00 ft
Total Perimeter Ft	40.00 ft
Doors	None

PROFILES

Description	Part Number	Total Quantity Required	Total List Cost	Discounted Total List Cost
Vertical Sill/Jamb Screw Spline Assembly (Jamb) / Horizontal Sill/Jamb Screw Spline Assembly (Sill)	BE9-2513	8ft, 8ft, 3ft, 3ft, 3ft, 3ft	\$838.00	\$514.53
Vertical Flush Filler	E9-2512	8ft x 3	\$150.00	\$92.10
Vertical Two Piece Mullion Screw Spline Assembly	BE9-2511	8ft x 3	\$497.00	\$305.16
Horizontal Horizontal Screw Spline Assembly	BE9-2515	3ft x 4	\$527.00	\$323.58

Description	Part Number	Total Quantity Required	Total List Cost	Discounted Total List Cost
Horizontal Head	BE9-2514	3ft x 4	\$444.00	\$272.62
Thermal Sill Flashing	BE9-2578	12ft	\$264.00	\$162.10
Horizontal Glass Stop (Use with BE9-2514, BE9-2515, BE9-2517)	E9-2519	3ft x 8	\$85.05	\$52.22
		Total Profile Cost	\$2,805.05	\$1,722.30

ACCESSORIES

Description	Part Number	Total Quantity Required	Total List Cost	Discounted Total List Cost
End Dam For Sill Flashing	E1-0199	2.00 pcs	\$64.80	\$39.79
Water Deflector	E2-0047	8.00 pcs	\$119.00	\$73.07
#12 x 1-1/4" PHSMS Type AB, Zinc Plated Steel, For Screw Spline Attachment	PC-1220	56.00 pcs	\$18.30	\$11.24
#10-24 x 3/8" PHMS, Stainless Steel, For Attachment of Sill to Sill Flashing	PM-1006-SS	12.00 pcs	\$46.65	\$28.64
#12 x 3/4" UFHSMS Type A, Zinc Plated Steel For End Dam Attachment	UA-1212	4.00 pcs	\$48.60	\$29.84
Setting Block Chair Use with E2-0177 Setting Block at Sill	E1-2530	8.00 pcs	\$36.00	\$22.10
Setting Block For Sill	E2-0177	8.00 pcs	\$76.95	\$47.25
1-1/8" "W" Side Block For Jamb	E2-0545	4.00 pcs	\$147.00	\$90.26
1/2" "W" Side Block For Intermediate Vertical Deep Pocket	E2-0154	6.00 pcs	\$56.70	\$34.81
Setting Block For Intermediate Horizontal	E2-0611	8.00 pcs	\$95.25	\$58.48
		Total Accessory Cost	\$786.20	\$482.73

GASKETS

Description	Part Number	Total Quantity Required	Total List Cost	Discounted Total List Cost
Glazing Gasket For 1" Glazing	E2-0052	224.00 ft	\$405.00	\$248.67
		Total Gasket Cost	\$405.00	\$248.67

GLASS

Glass Area (Adjusted)

Description	Part Number	Total Quantity Required	Total List Cost	Discounted Total List Cost
Glass Area (Adjusted)	N/A	83.75 sqft	\$879.38	\$879.38
		Total Glass Cost	\$879.38	\$879.38

FABRICATION

Joints Fabrication Labor

Description	Part Number	Total Quantity Required	Total List Cost	Discounted Total List Cost
Joints Fabrication Labor	N/A	24.00 joints	\$360.00	\$360.00
		Total Fabrication Cost	\$360.00	\$360.00

SUMMARY

PROFILES

Description	Project Total Materials	Total Feet Required	Sticks Required	Total Quantity Required	Total List Cost	Discounte d Total List Cost	Residual Material Quantity	Residual Waste %	Residual Material Cost
Vertical Sill/Jamb Screw Spline Assembly (Jamb)	BE9-2513 (clear)	28.00 ft	2 (24ft per)	8ft x2, 3ft x4	\$838.00	\$514.53	18ft x1, 2ft x1	41.67%	\$214.39
Vertical Flush Filler	E9-2512 (clear)	24.00 ft	1 (24ft per)	8ft x3	\$150.00	\$92.10	0.00 ft	0.00%	\$0.00
Vertical Two Piece Mullion Screw Spline Assembly	BE9-2511 (clear)	24.00 ft	1 (24ft per)	8ft x3	\$497.00	\$305.16	0.00 ft	0.00%	\$0.00
Horizontal Horizontal Screw Spline Assembly	BE9-2515 (clear)	12.00 ft	1 (24ft per)	3ft x4	\$527.00	\$323.58	12ft x1	50.00%	\$161.79
Horizontal Head	BE9-2514 (clear)	12.00 ft	1 (24ft per)	3ft x4	\$444.00	\$272.62	12ft x1	50.00%	\$136.31
Thermal Sill Flashing	BE9-2578 (clear)	12.00 ft	1 (24ft per)	12ft	\$264.00	\$162.10	12ft x1	50.00%	\$81.05
Horizontal Glass Stop (Use with BE9-2514, BE9-2515, BE9-2517)	E9-2519 (clear)	24.00 ft	1 (24ft per)	3ft x8	\$85.05	\$52.22	0.00 ft	0.00%	\$0.00
				Total Profile Cost	\$2,805.05	\$1,722.30			\$593.53

ACCESSORIES

Description	Project Total Materials	Total Pieces Required	Quantity Per Order	Orders Required	Total List Cost	Discounte d Total List Cost	Residual Material Quantity	Residual Waste %	Residual Material Cost
End Dam For Sill Flashing	E1-0199	2.00 pcs	20 pcs per	1 order	\$64.80	\$39.79	18.00 pcs	90.00%	\$35.81
Water Deflector	E2-0047	8.00 pcs	50 pcs per	1 order	\$119.00	\$73.07	42.00 pcs	84.00%	\$61.38
#12 x 1-1/4" PHSMS Type AB, Zinc Plated Steel, For Screw Spline Attachment	PC-1220	56.00 pcs	100 pcs per	1 order	\$18.30	\$11.24	44.00 pcs	44.00%	\$4.94

Description	Project Total Materials	Total Pieces Required	Quantity Per Order	Orders Required	Total List Cost	Discounted Total List Cost	Residual Material Quantity	Residual Waste %	Residual Material Cost
#10-24 x 3/8" PHMS, Stainless Steel, For Attachment of Sill to Sill Flashing	PM-1006-SS	12.00 pcs	100 pcs per	1 order	\$46.65	\$28.64	88.00 pcs	88.00%	\$25.21
#12 x 3/4" UFHSMS Type A, Zinc Plated Steel For End Dam Attachment	UA-1212	4.00 pcs	100 pcs per	1 order	\$48.60	\$29.84	96.00 pcs	96.00%	\$28.65
Setting Block Chair Use with E2-0177 Setting Block at Sill	E1-2530	8.00 pcs	1 pcs per	8 orders	\$36.00	\$22.10	0.00 pcs	0.00%	\$0.00
Side Block For Intermediate Vertical Shallow Pocket	E2-0166	6.00 pcs	50 pcs per	1 order	\$76.95	\$47.25	44.00 pcs	88.00%	\$41.58
Setting Block For Sill	E2-0177	8.00 pcs	50 pcs per	1 order	\$76.95	\$47.25	42.00 pcs	84.00%	\$39.69
1-1/8" "W" Side Block For Jamb	E2-0545	4.00 pcs	50 pcs per	1 order	\$147.00	\$90.26	46.00 pcs	92.00%	\$83.04
1/2" "W" Side Block For Intermediate Vertical Deep Pocket	E2-0154	6.00 pcs	50 pcs per	1 order	\$56.70	\$34.81	44.00 pcs	88.00%	\$30.64
Setting Block For Intermediate Horizontal	E2-0611	8.00 pcs	50 pcs per	1 order	\$95.25	\$58.48	42.00 pcs	84.00%	\$49.13
				Total Accessory Cost	\$786.20	\$482.73			\$400.05

GASKETS

Description	Project Total Materials	Total Feet Required	Rolls Required	Total Quantity Required	Total List Cost	Discounted Total List Cost	Residual Material Quantity	Residual Waste %	Residual Material Cost
Glazing Gasket For 1" Glazing	E2-0052 (clear)	224.00 ft	1 (500ft per)	224ft	\$405.00	\$248.67	276ft x1	55.20%	\$137.27
				Total Gasket Cost	\$405.00	\$248.67			\$137.27

GLASS

Glass Area (Adjusted)

LABOR

Joints Fabrication Labor

COST OVERVIEW

Item	Value
List Price Total:	\$5,235.62
Discounted Total:	\$3,693.07
Waste Percentage:	30.62%

MISCELLANEOUS COSTS

Item	Value
Overhead Materials	\$36.93

Overhead Labor

Item	Value
Admin and Management	\$36.93
Engineering	\$36.93
Packaging Materials	\$36.93
Shipping and Transport	\$36.93
Commissions	\$36.93

SUBTOTAL

MARKUPS / PROFIT

Profit on Material

Profit on Waste

Profit on Glass Purchase

Profit on Wages

Item	Value
Planning / Technical Office	\$36.93
Commission	\$36.93

SUBTOTAL

PROJECT TOTAL

Item	Value
Discounted Total:	\$3,693.07


+ Miscellaneous:

+ Markups:

GRAND TOTAL:

Project Cost Breakdown

Project Cost Breakdown

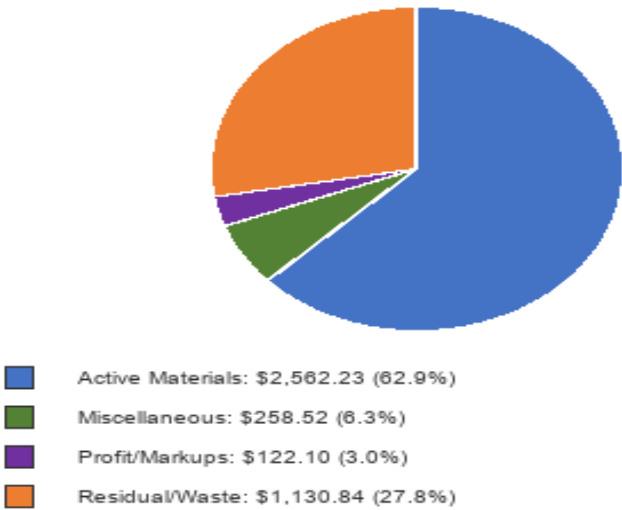

Grand Total: \$4,073.69